

FLESSIBILI PER ACQUA E GAS ACCESSORI PER CALDAIE E CONDIZIONAMENTO

**FLEXIBLES FOR WATER AND GAS
ACCESSORIES FOR BOILERS AND CONDITIONING**

Prima di installare / Pre-Installation

1. Esaminare la superficie del tubo, i filetti, la treccia e la torsione
Examine the surface of the hose including the threads , braiding, twisting ect.
2. Controllate due volte le applicazioni per ogni tubo
Double check the application of every hose.

Installazione / Installation





1. Non posizionare il tubo in modo troppo aderente
Don't put the hose in a snug place.
2. Non posizionare il tubo in un posto nascosto
Don't install the hose in a concealed location.
3. Non mettere il tubo di fianco a parti appuntite
Don't put the hose besides any sharp-pointed instruments.
4. Il tubo deve essere ben protetto se installato in un luogo nascosto
The hose should be well packed by a protective film when the hose are installing in a concealed location.
5. Seguire il principio del minimo raggio quando il tubo deve essere piegato durante l'installazione
It should follow the principle of minimum radius when the hose needs to be bent in installation.

Dopo l'installazione / After-Installation


1. Non posizionare il tubo vicino ad una fonte di calore
Don't put the hose in any hot place.
2. Non effettuare saldature vicino al tubo
Don't do any welding stuff near the hose.

Lunghezza / Length


Come misurare la lunghezza del tubo (tolleranza: $\pm 2\%$)
Different ways on how to measure a hose(Tolerance: $\pm 2\%$)



operazioni errate / wrong operation

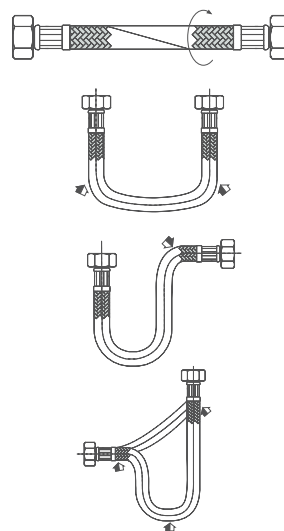

operazioni corrette / correct operation

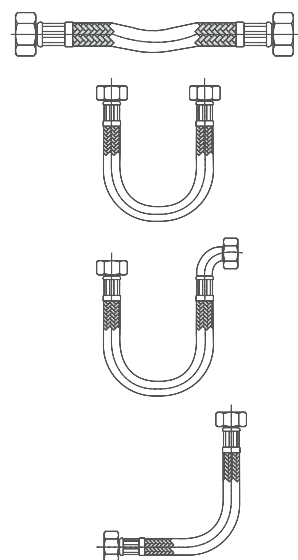



Rotoli in rame cromato

Chrome plated soft copper rolls

cod.	misura	pz. x conf.	euro cad.
1340R00010	10 x 5000 mm	10	56,300
1340R00012	12 x 5000 mm	8	71,700
1340R00014	14 x 5000 mm	5	79,000



Tubetto in rame cromato con cartella e calotta

Chrome plated soft copper smooth pipe with nut

cod.	misura	pz. x conf.	euro cad.
1332S00C20	3/8" x 200 mm	25	4,700
1332S00C25	3/8" x 250 mm	25	5,300
1332S00C30	3/8" x 300 mm	25	5,750
1332S00C35	3/8" x 350 mm	25	6,100
1332S00C40	3/8" x 400 mm	25	6,550
1332S00C50	3/8" x 500 mm	25	7,900
1332S00D20	1/2" x 200 mm	25	4,870
1332S00D25	1/2" x 250 mm	25	5,550
1332S00D30	1/2" x 300 mm	25	5,910
1332S00D35	1/2" x 350 mm	25	6,400
1332S00D40	1/2" x 400 mm	25	6,800
1332S00D50	1/2" x 500 mm	25	8,100



Barre in rame cromato

Chrome plated soft copper rods

cod.	misura	pz. x conf.	euro cad.
1338B0010A	10 x 1000 mm	10	12,110
1338B0010B	10 x 1500 mm	10	17,950
1338B0012A	12 x 1000 mm	10	13,810
1338B0012B	12 x 1500 mm	10	19,860
1338B0014A	14 x 1000 mm	10	15,600
1338B0014B	14 x 1500 mm	10	21,500



Prolunga per tubetti in rame cromato, calotta conica con guarnizione

- gomma e rondella spaccata in ottone 10 x 300 mm

Chrome plated copper extension for tube, conic cap with rubber gasket and chrome plated brass washer 10x300 mm

cod.	misura	pz. x conf.	euro cad.
1332NT0000	3/8" x 10	25	6,600



Tubetti sottolavabo ø 10, rame cromato con raccordo M 10/1 per rubinetteria

Chromed soft copper pipe ø 10 with connector M 10/1

cod.	misura	pz. x conf.	euro cad.
1332PD0300	30 cm	25	4,460
1332PD0350	35 cm	25	4,850
1332PD0400	40 cm	25	5,350
1332PD0500	50 cm	25	6,500

**Squadretta in rame cromato**

Chrome plated soft copper little-square

cod.	misura	pz. x conf.	euro cad.
1339S0010B	ø 10 - 150 x 250 mm	10	5,570
1339S0010E	ø 10 - 200 x 300 mm	10	7,270
1339S0012B	ø 12 - 150 x 250 mm	10	5,970
1339S0012E	ø 12 - 200 x 300 mm	10	7,750
1339S0014B	ø 14 - 150 x 250 mm	10	7,560
1339S0014E	ø 14 - 200 x 300 mm	10	9,100

**Squadretta in rame cromato con rosette, nipples e dado**


Chrome plated soft copper little-square with rosette, nipple and nut

cod.	misura	pz. x conf.	euro cad.
1339000010	ø 10 - 150 x 250 mm	5	12,300
1339000012	ø 12 - 150 x 250 mm	5	13,600
1339000014	ø 14 - 150 x 250 mm	5	14,800

**Kit completo ottone cromato per scaldabagno**

Chrome plated brass complete kit for boiler

cod.	pz. x conf.	euro cad.
1407000000	5	44,200


**Attacchi flessibili "FF" in treccia acciaio inox, interno EPDM alimentare**

Flexible hose "FF" in stainless steel plait, internal EPDM

NOME	MATERIALE
① dado esagonale	OTTONE
② guarnizione	NBR
③ cartella	OTTONE
④ bussola	AISI 304
⑤ tubo trecciato	AISI 304 / EPDM

NAME	MATERIAL
① hexagonal nut	BRASS
② washer	NBR
③ core	BRASS
④ sleeve	AISI 304
⑤ S.S. braided hose	AISI 304 / EPDM

cod.	misura	pz. x conf.	euro cad.
1325IFCC20	3/8" x 3/8" x 20 cm	25	4,593
1325IFCC25	3/8" x 3/8" x 25 cm	25	4,836
1325IFCC30	3/8" x 3/8" x 30 cm	25	5,078
1325IFCC35	3/8" x 3/8" x 35 cm	25	5,321
1325IFCC40	3/8" x 3/8" x 40 cm	25	5,563
1325IFCC50	3/8" x 3/8" x 50 cm	25	6,048
1325IFCD20	3/8" x 1/2" x 20 cm	25	4,593
1325IFCD25	3/8" x 1/2" x 25 cm	25	4,836
1325IFCD30	3/8" x 1/2" x 30 cm	25	5,078
1325IFCD35	3/8" x 1/2" x 35 cm	25	5,321
1325IFCD40	3/8" x 1/2" x 40 cm	25	5,563
1325IFCD50	3/8" x 1/2" x 50 cm	25	6,048
1325IFDD20	1/2" x 1/2" x 20 cm	25	4,593
1325IFDD25	1/2" x 1/2" x 25 cm	25	4,836
1325IFDD30	1/2" x 1/2" x 30 cm	25	5,078
1325IFDD35	1/2" x 1/2" x 35 cm	25	5,321
1325IFDD40	1/2" x 1/2" x 40 cm	25	5,563
1325IFDD50	1/2" x 1/2" x 50 cm	25	6,048

**Attacchi flessibili "MF" in treccia acciaio inox, interno EPDM alimentare**

Flexible hose "MF" in stainless steel, internal EPDM

NOME	MATERIALE
① dado esagonale	OTTONE
② guarnizione	NBR
③ cartella	OTTONE
④ bussola	AISI 304
⑤ tubo trecciato	AISI 304 / EPDM

NAME	MATERIAL
① hexagonal nut	BRASS
② washer	NBR
③ core	BRASS
④ sleeve	AISI 304
⑤ S.S. braided hose	AISI 304 / EPDM

cod.	misura	pz. x conf.	euro cad.
1325IMCC20	3/8" x 3/8" x 20 cm	25	4,593
1325IMCC25	3/8" x 3/8" x 25 cm	25	4,836
1325IMCC30	3/8" x 3/8" x 30 cm	25	5,078
1325IMCC35	3/8" x 3/8" x 35 cm	25	5,321
1325IMCC40	3/8" x 3/8" x 40 cm	25	5,563
1325IMCC50	3/8" x 3/8" x 50 cm	25	6,048
1325IMCD20	3/8" x 1/2" x 20 cm	25	4,593
1325IMCD25	3/8" x 1/2" x 25 cm	25	4,836
1325IMCD30	3/8" x 1/2" x 30 cm	25	5,078
1325IMCD35	3/8" x 1/2" x 35 cm	25	5,321
1325IMCD40	3/8" x 1/2" x 40 cm	25	5,563
1325IMCD50	3/8" x 1/2" x 50 cm	25	6,048
1325IMDC20	1/2" x 3/8" x 20 cm	25	4,593
1325IMDC25	1/2" x 3/8" x 25 cm	25	4,836
1325IMDC30	1/2" x 3/8" x 30 cm	25	5,078
1325IMDC35	1/2" x 3/8" x 35 cm	25	5,321
1325IMDC40	1/2" x 3/8" x 40 cm	25	5,563
1325IMDC50	1/2" x 3/8" x 50 cm	25	6,048
1325IMDD20	1/2" x 1/2" x 20 cm	25	4,593
1325IMDD25	1/2" x 1/2" x 25 cm	25	4,836
1325IMDD30	1/2" x 1/2" x 30 cm	25	5,078
1325IMDD35	1/2" x 1/2" x 35 cm	25	5,321
1325IMDD40	1/2" x 1/2" x 40 cm	25	5,563
1325IMDD50	1/2" x 1/2" x 50 cm	25	6,048



Attacco flessibile in
treccia acciaio inox,
interno EPDM
atossica con maschio
prolungato 1/2" e
maschio normale 3/8"
per dado 3/8"
mm 10

cod.	misura	pz. x conf.	euro cad.
13250GMD20	1/2" x 20 cm	25	6,672
13250GMD25	1/2" x 25 cm	25	6,944
13250GMD30	1/2" x 30 cm	25	7,211
13250GMD35	1/2" x 35 cm	25	7,483
13250GMD40	1/2" x 40 cm	25	7,751

Flexible hose stainless steel, internal EPDM with longer male 1/2" and normal 3/8" for nut 3/8" 10mm



Attacco flessibile in
treccia acciaio inox,
interno EPDM maschio
prolungato 1/2" con
maschio prolungato
3/8" per dado 3/8"
mm 10

cod.	misura	pz. x conf.	euro cad.
13250GID20	1/2" x 20 cm	25	7,700
13250GID25	1/2" x 25 cm	25	7,950
13250GID30	1/2" x 30 cm	25	8,200
13250GID35	1/2" x 35 cm	25	8,450
13250GID40	1/2" x 40 cm	25	8,800

Flexible hose stainless steel, internal EPDM with longer male 1/2" longer male 3/8" for nut 3/8" 10mm



Attacchi flessibili "F"
in treccia acciaio inox,
interno EPDM atossica
e ogiva ø 10 mm
prolungata

Flexible hose "F" in
stainless steel,
internal EPDM, ogive
ø 10 mm

cod.	misura	pz. x conf.	euro cad.
13250GIFC20	3/8" x 20 cm	25	5,750
13250GIFC25	3/8" x 25 cm	25	6,000
13250GIFC30	3/8" x 30 cm	25	6,300
13250GIFC35	3/8" x 35 cm	25	6,550
13250GIFC40	3/8" x 40 cm	25	6,800
13250GIFD20	1/2" x 20 cm	25	5,750
13250GIFD25	1/2" x 25 cm	25	6,000
13250GIFD30	1/2" x 30 cm	25	6,300
13250GIFD35	1/2" x 35 cm	25	6,550
13250GIFD40	1/2" x 40 cm	25	6,800



Attacchi flessibili in
treccia acciaio inox,
interno EPDM atossica,
"MF" maschio
prolungato

Flexible hose in
stainless steel, internal
EPDM with extended
male, MF

cod.	misura MPxF	pz. x conf.	euro cad.
1326IMCC20	3/8" x 3/8" x 20 cm	25	5,720
1326IMCC25	3/8" x 3/8" x 25 cm	25	5,980
1326IMCC30	3/8" x 3/8" x 30 cm	25	6,220
1326IMCC35	3/8" x 3/8" x 35 cm	25	6,470
1326IMCC40	3/8" x 3/8" x 40 cm	25	6,720
1326IMCC50	3/8" x 3/8" x 50 cm	25	7,220
1326IMCD20	3/8" x 1/2" x 20 cm	25	5,720
1326IMCD25	3/8" x 1/2" x 25 cm	25	5,980
1326IMCD30	3/8" x 1/2" x 30 cm	25	6,220
1326IMCD35	3/8" x 1/2" x 35 cm	25	6,470
1326IMCD40	3/8" x 1/2" x 40 cm	25	6,720
1326IMCD50	3/8" x 1/2" x 50 cm	25	7,220
1326IMDC20	1/2" x 3/8" x 20 cm	25	5,720
1326IMDC25	1/2" x 3/8" x 25 cm	25	5,980
1326IMDC30	1/2" x 3/8" x 30 cm	25	6,220
1326IMDC35	1/2" x 3/8" x 35 cm	25	6,470
1326IMDC40	1/2" x 3/8" x 40 cm	25	6,720
1326IMDC50	1/2" x 3/8" x 50 cm	25	7,220
1326IMDD20	1/2" x 1/2" x 20 cm	25	5,720
1326IMDD25	1/2" x 1/2" x 25 cm	25	5,980
1326IMDD30	1/2" x 1/2" x 30 cm	25	6,220
1326IMDD35	1/2" x 1/2" x 35 cm	25	6,470
1326IMDD40	1/2" x 1/2" x 40 cm	25	6,720
1326IMDD50	1/2" x 1/2" x 50 cm	25	7,220

Attacchi flessibili per
monocomando in
treccia acciaio inox
F e M 10 x 1, interno
EPDM atossica con
tubetto prolungato

Flexible hose in
stainless steel,
internal EPDM, male
M10 x 1 female

cod.	misura	pz. x conf.	euro cad.
1325MTPC30	3/8" x 30 cm	25	5,500
1325MTPC35	3/8" x 35 cm	25	5,800
1325MTPC40	3/8" x 40 cm	25	6,100
1325MTPC50	3/8" x 50 cm	25	6,750
1325MTPD30	1/2" x 30 cm	25	5,750
1325MTPD35	1/2" x 35 cm	25	6,100
1325MTPD40	1/2" x 40 cm	25	6,400
1325MTPD50	1/2" x 50 cm	25	7,000



Flessibile antivibrante MF	cod.	misura	pz. x conf.	euro cad.
Anti-vibration flexible hose MF	1329MFDD30	1/2" x 1/2" x 30 cm	5	7,370
	1329MFDD40	1/2" x 1/2" x 40 cm	5	8,120
	1329MFDD50	1/2" x 1/2" x 50 cm	5	8,880
	1329MFDD60	1/2" x 1/2" x 60 cm	1	9,680
	1329MFDD80	1/2" x 1/2" x 80 cm	1	11,310
	1329MFD100	1/2" x 1/2" x 100 cm	1	12,880
	1329MFD150	1/2" x 1/2" x 150 cm	1	17,170
	1329MFFF30	3/4" x 3/4" x 30 cm	5	11,130
	1329MFFF40	3/4" x 3/4" x 40 cm	5	12,360
	1329MFFF50	3/4" x 3/4" x 50 cm	5	13,630
	1329MFFF60	3/4" x 3/4" x 60 cm	1	14,730
	1329MFFF80	3/4" x 3/4" x 80 cm	1	17,170
	1329MFF100	3/4" x 3/4" x 100 cm	1	19,600
	1329MFF150	3/4" x 3/4" x 150 cm	1	26,210
	1329MFGG30	1" x 1" x 30 cm	5	15,500
	1329MFGG40	1" x 1" x 40 cm	5	17,250
	1329MFGG50	1" x 1" x 50 cm	5	18,970
	1329MFGG60	1" x 1" x 60 cm	1	20,590
	1329MFGG80	1" x 1" x 80 cm	1	24,100
	1329MFG100	1" x 1" x 100 cm	1	27,500
	1329MFG150	1" x 1" x 150 cm	1	36,850
	1329MFGB30	1"1/4" x 1"1/4" x 30 cm	5	31,600
	1329MFGB40	1"1/4" x 1"1/4" x 40 cm	5	34,220
	1329MFGB50	1"1/4" x 1"1/4" x 50 cm	5	36,710
	1329MFGB60	1"1/4" x 1"1/4" x 60 cm	1	39,200
	1329MFGB80	1"1/4" x 1"1/4" x 80 cm	1	44,370
	1329MFGB100	1"1/4" x 1"1/4" x 100 cm	1	49,500
	1329MFGB150	1"1/4" x 1"1/4" x 150 cm	1	62,920
	1329MFGD30	1"1/2" x 1"1/2" x 30 cm	5	45,250
	1329MFGD40	1"1/2" x 1"1/2" x 40 cm	5	48,850
	1329MFGD50	1"1/2" x 1"1/2" x 50 cm	5	52,480
	1329MFGD60	1"1/2" x 1"1/2" x 60 cm	1	55,970
	1329MFGD80	1"1/2" x 1"1/2" x 80 cm	1	63,200
	1329MFGD100	1"1/2" x 1"1/2" x 100 cm	1	70,500
	1329MFGD150	1"1/2" x 1"1/2" x 150 cm	1	90,500
	1329MFHH30	2" x 2" x 30 cm	5	70,500
	1329MFHH40	2" x 2" x 40 cm	5	75,200
	1329MFHH50	2" x 2" x 50 cm	5	80,000
	1329MFHH60	2" x 2" x 60 cm	1	84,800
	1329MFHH80	2" x 2" x 80 cm	1	94,300
	1329MFH100	2" x 2" x 100 cm	1	104,000
	1329MFH150	2" x 2" x 150 cm	1	129,100

Attacchi flessibili per
monocomando in
treccia acciaio inox
F e M 10 x 1, interno
EPDM atossica
Flexible hose in
stainless steel,
internal EPDM, male
M10 x 1 female

	cod.	misura	pz. x conf.	euro cad.
	1325MFNC30	3/8" x 30 cm	25	4,900
	1325MFNC35	3/8" x 35 cm	25	5,200
	1325MFNC40	3/8" x 40 cm	25	5,550
	1325MFNC50	3/8" x 50 cm	25	6,200
	1325MFND30	1/2" x 30 cm	25	5,150
	1325MFND35	1/2" x 35 cm	25	5,500
	1325MFND40	1/2" x 40 cm	25	5,800
	1325MFND50	1/2" x 50 cm	25	6,500



Raccordi
flessibili
estensibili in
acciaio inox per
acqua sanitaria,
riscaldamento e
liquidi alimentari
Stainless steel
extensible
flexible hoses for
sanitary water,
heating and food
liquid

	cod.	misura	pz. x conf.	euro cad.
	3012AIMFD1	1/2" 75-150 mm DN 15	18	8,600
	3012AIMFD2	1/2" 100-200 mm DN 15	18	8,900
	3012AIMFD3	1/2" 200-400 mm DN 15	18	11,100
	3012AMFDF1	1/2" x 3/4" 75-150 mm DN 15	18	12,200
	3012AMFDF2	1/2" x 3/4" 100-200 mm DN 15	18	12,600
	3012AMFDF3	1/2" x 3/4" 200-400 mm DN 15	18	14,700
	3012AIMFF1	3/4" 75-150 mm DN 20	18	12,200
	3012AIMFF2	3/4" 100-200 mm DN 20	18	12,600
	3012AIMFF3	3/4" 200-400 mm DN 20	18	14,700
	3012AIMFG2	1" 100-200 mm DN 25	18	20,200
	3012AIMFG3	1" 200-400 mm DN 25	18	23,500
	3012AMFGB2	1" 1/4 100-200 mm DN 32	18	38,000
	3012AMFGB3	1" 1/4 200-400 mm DN 32	18	46,300
	3012AMFGD1	1" 1/2 100-200 mm DN 40	18	48,100
	3012AIMFH1	2" 100-200 mm DN 50	18	63,900



	cod.	misura	pz. x conf.	euro cad.
DN 15	3012NMFDD1	1/2" 75-150 mm	18	10,200
DN 15	3012NMFDD2	1/2" 100-200 mm	18	10,800
DN 15	3012NMFDD3	1/2" 200-400 mm	18	13,400
DN 15	3012NMFDF1	1/2" x 3/4" 75-150 mm	18	13,900
DN 15	3012NMFDF2	1/2" x 3/4" 100-200 mm	18	15,200
DN 15	3012NMFDF3	1/2" x 3/4" 200-400 mm	18	18,400
DN 20	3012NMFFF1	3/4" 75-150 mm	18	14,100
DN 20	3012NMFFF2	3/4" 100-200 mm	18	15,200
DN 20	3012NMFFF3	3/4" 200-400 mm	18	18,400
DN 25	3012NMFEG1	1" 75-150 mm	18	20,800
DN 25	3012NMFEG2	1" 100-200 mm	18	22,200
DN 25	3012NMFEG3	1" 200-400 mm	18	27,600

Raccordo flessibile estensibile, idoneo per gas secondo UNI 11353, idoneo per acqua secondo il D.M. 174. Protezione esterna ignifuga-atossica con guaina in poliolefina termoretraibile omologato per collegamenti alla rete di gas/acqua di caldaie e scaldabagni

Extendable flexible fitting, suitable for gas according to UNI 11353, suitable for water according to D.M. 174. Flame retardant-non-toxic external protection with sheath in shrinkable polyolefin approved for connections to the gas / water network of boilers and water heaters

	cod.	misura	pz. x conf.	euro cad.
DN 15	3012GAMFD1	1/2" 75-150 mm	18	10,200
DN 15	3012GAMFD2	1/2" 100-200 mm	18	10,800
DN 15	3012GAMFD3	1/2" 200-400 mm	18	13,400
DN 15	3012GMFDF1	1/2" x 3/4" 75-150 mm	18	14,100
DN 15	3012GMFDF2	1/2" x 3/4" 100-200 mm	18	15,200
DN 15	3012GMFDF3	1/2" x 3/4" 200-400 mm	18	18,400
DN 20	3012GAMFF1	3/4" 75-150 mm	18	14,100
DN 20	3012GAMFF2	3/4" 100-200 mm	18	15,200
DN 20	3012GAMFF3	3/4" 200-400 mm	18	18,400
DN 25	3012GAMFG1	1" 75-150 mm	18	20,800
DN 25	3012GAMFG2	1" 100-200 mm	18	22,200
DN 25	3012GAMFG3	1" 200-400 mm	18	27,600

Raccordi flessibili estensibili, protezione esterna ignifuga-atossica guaina in poliolefina termoretraibile, omologato per collegamenti alla rete di gas/acqua da caldaie e scaldabagni

Flexible extendable fittings, fireproof non-toxic external protection heat shrinkable polyolefin sheath, approved for connections to the gas / water network from boilers and water heaters



KIT UNIVERSALE PER ALLACCIAMENTO CALDAIA

Nr 2 flessibili acqua 1/2"

Nr 2 flessibili acqua 3/4"

Nr 1 flessibile gas 3/4"

Completo di guarnizioni e scatola

UNIVERSAL KIT FOR BOILER CONNECTION


Nr 2 water flexibles 1/2"

Nr 2 water flexibles 3/4"

Nr 1 gas flexibles 3/4"


Complete with gaskets and box

cod.	misura	pz. x conf.	euro cad.
3012GASKT1	MF 130 - 260 mm.	1	51,000
3012GASKT2	MF 220 - 420 mm.	1	57,000

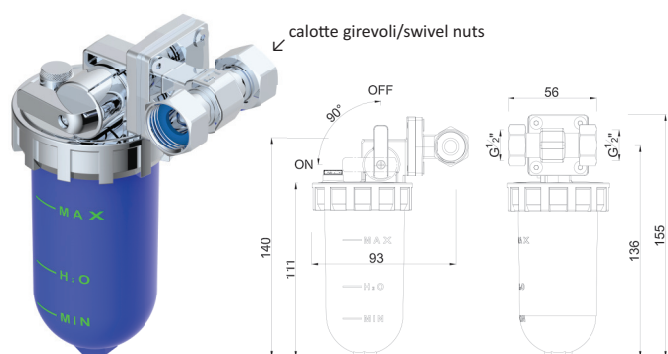


Dosatori proporzionali di polifosfato
attacco laterale con calotte girevoli
Proportional polyphosphate feeders side connection and swivel nuts

cod.	pz. x conf.	euro cad.
1484DOSP40	1/2" FF	12 55,700

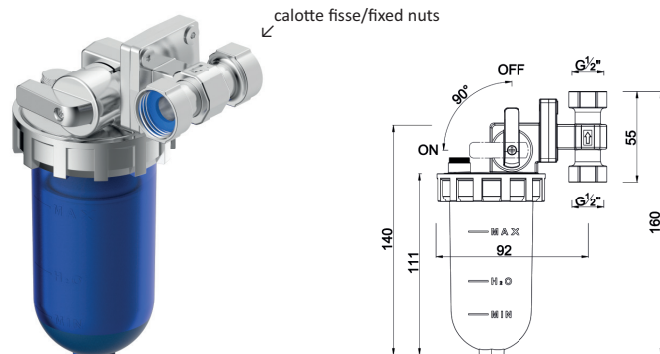


Dosatori proporzionali di polifosfato
attacco laterale con calotte fisse
Proportional polyphosphate feeders side connection and fixed nuts

cod.	pz. x conf.	euro cad.
1484DOSF40	1/2" FF	12 55,700

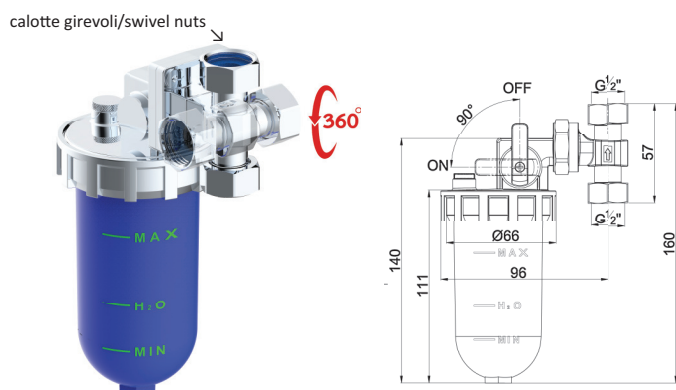


Dosatori proporzionali di polifosfato
attacco 360° e calotte girevoli
Proportional polyphosphate feeders 360° connection and swivel nuts

cod.	pz. x conf.	euro cad.
1484DOS360	1/2" FF	12 55,700

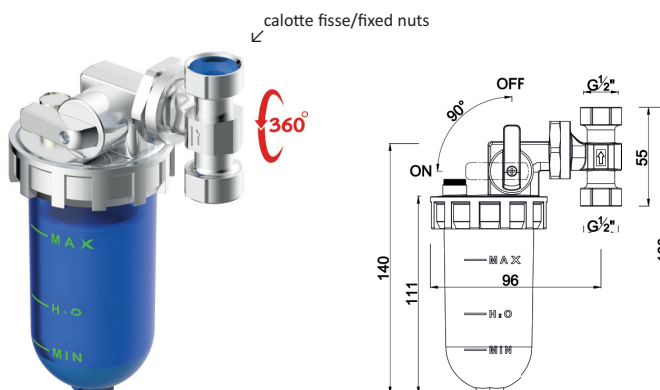

Dosatori proporzionali di polifosfato
attacco girevole 360° e calotte fisse
Proportional polyphosphate feeders swivel 360° connection and fixed nuts

cod.	pz. x conf.	euro cad.
1484DOF360	1/2" FF	12 55,700

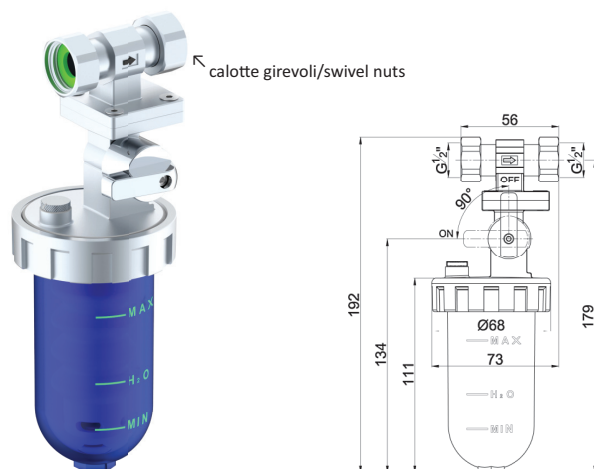


Dosatori proporzionali di polifosfato
attacco superiore e calotte girevoli
Proportional polyphosphate feeders horizontal top connection and swivel nuts

cod.	pz. x conf.	euro cad.
1484DOSP35	1/2" FF	12 55,700




Ricarica universale per dosatori proporzionali di polifosfato - 6 ricariche
Universal charge for proportional dosing units - 6 pieces

cod.	pz. x conf.	euro cad.
1484DOSTIK	12	15,200

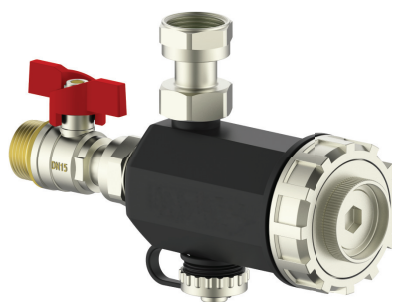


Defangatore magnetico
magnetic dirt separator

Corpo/Body: Nylon66 GF30
Filtro/Strainer: Aisi304

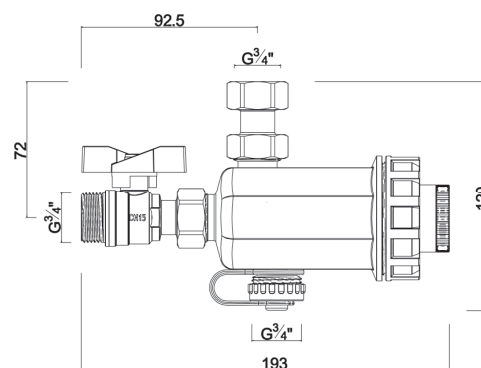


cod.	misura	pz. x conf.	euro cad.
1484DEF001	3/4"	12	80,000

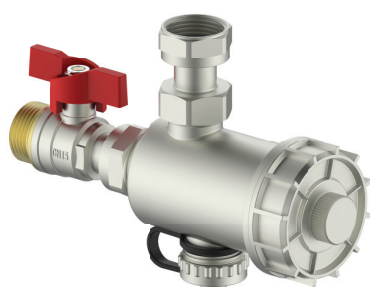


Defangatore magnetico
magnetic dirt separator



Corpo/Body: ottone/brass
Filtro/Strainer: Aisi304

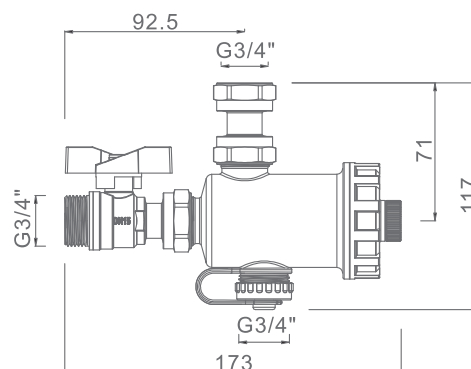

cod.	misura	pz. x conf.	euro cad.
1484DEF002	3/4"	12	100,000

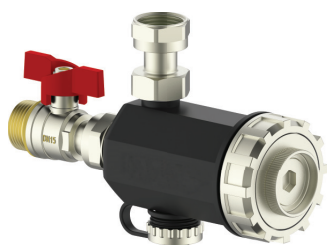

KIT SALVA CALDAIA
BOILER SAVING KIT

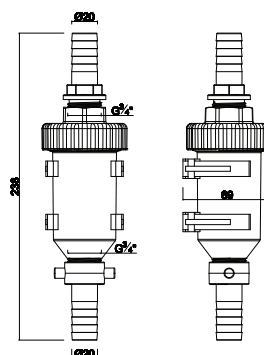

KIT salva caldaia con
defangatore magne-
tico, dosatore di polifosfato attacco laterale e filtro neutralizzatore
di condensa

KIT boiler saving including magnetic dirt separator,
polyphosphate feeder with side connection and condensate
neutralizing filter

cod.	pz. x conf.	euro cad.
1484KIT000	12	130,000

Filtro neutralizzatore
di condensa,

completo di attacco verticale e curvo e supporti di fissaggio
Condensate neutralizing filter, complete with straight and bend
connection and fixing supports

cod.	pz. x conf.	euro cad.
1484NEUT00	12	20,700



Raccordo flessibile MF costruito a norma UNI EN 14800/2007.
Tubo di sicurezza per uso con apparecchi domestici a gas naturale

Flexible joint MF made in according with normative UNI EN 14800/2007.
Safety hose suitable for use with domestic appliances powered by natural gas.


cod.	misura	pz. x conf.	euro cad.
5029NTM500	1/2" x 1/2" L 500	12	20,400
5029NTM750	1/2" x 1/2" L 750	12	21,000
5029NTM100	1/2" x 1/2" L 1000	12	24,100
5029NTM150	1/2" x 1/2" L 1500	12	28,700
5029NTM200	1/2" x 1/2" L 2000	12	33,300



Raccordo flessibile FF costruito a norma UNI EN 14800/2007.
Tubo di sicurezza per uso con apparecchi domestici a gas naturale

Flexible joint FF made in according with normative UNI EN 14800/2007.
Safety hose suitable for use with domestic appliances powered by natural gas.

cod.	misura	pz. x conf.	euro cad.
5029NTF500	1/2" x 1/2" L 500	12	20,400
5029NTF750	1/2" x 1/2" L 750	12	21,000
5029NTF100	1/2" x 1/2" L 1000	12	24,100
5029NTF150	1/2" x 1/2" L 1500	12	28,700
5029NTF200	1/2" x 1/2" L 2000	12	33,300

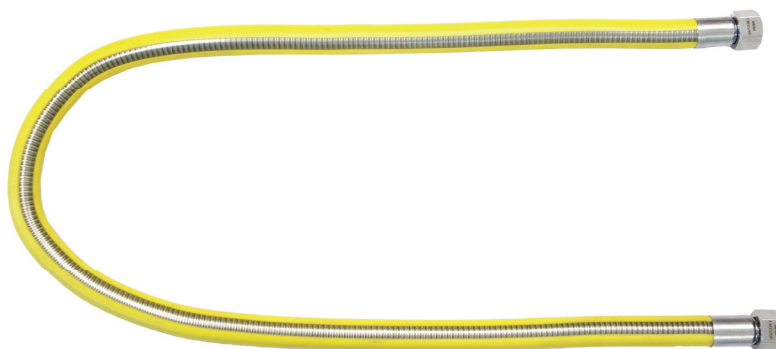

Raccordo flessibile FF costruito a norma UNI EN 15266:2007
Tubo di sicurezza per uso con apparecchi domestici a gas naturale

Flexible joint FF made in according with standard UNI EN 15266:2017
Safety hose suitable for use with domestic appliances powered by natural gas.

cod.	misura	pz. x conf.	euro cad.
5029URF100	1/2" x 1/2" L 1000	12	17,000
5029URF150	1/2" x 1/2" L 1500	12	20,800
5029URF200	1/2" x 1/2" L 2000	12	25,800
5029URF300	1/2" x 1/2" L 3000	12	35,600
5029URF400	1/2" x 1/2" L 4000	12	45,500



	cod.	misura	pz. x conf.	euro cad.
Gomito in ottone maschio - maschio	50290TTMMD	1/2" pass.int. ø 13	10	3,200
Brass MM elbow	50290TTMMF	3/4" pass.int. ø 19	10	3,600



	cod.	misura	pz. x conf.	euro cad.
Gomito in ottone maschio - femmina	50290TTMFD	MF 1/2" pass.int. ø 13	10	3,500
Brass MF elbow				



	cod.	misura	pz. x conf.	euro cad.
Rubinetto in ottone sbiancato per gas	1500NTMDD	MM 1/2" x 1/2"	20	13,400
Nichel plated valve for gas	1500NTMFDD	MF 1/2" x 1/2"	20	13,400



	cod.	misura	pz. x conf.	euro cad.
Rubinetto in ottone sbiancato per gas con girello	1500NTGMDD	MF 1/2" x 1/2"	20	14,400
Roating nichel plated valve for gas	1500NTGFDD	FF 1/2" x 1/2"	20	14,400



	cod.	pz. x conf.	euro cad.
Giunto in ottone cromato con adattatori in gomma per gas metano o liquido	5029G00000	10	9,300


Chrome plated brass connection with rubber adapters for natural or liquid gas



Raccordo portagomma metano diritto in ottone nudo - femmina

Yellow brass straight hose connection F for natural gas

cod.	misura	pz. x conf.	euro cad.
139200000C	F 3/8"	10	2,300
139200000D	F 1/2"	10	2,700



Raccordo portagomma metano in ottone nudo tipo curvo - femmina

Yellow brass bended hose connection F for natural gas

cod.	misura	pz. x conf.	euro cad.
139300000C	F 3/8"	10	3,800
139300000D	F 1/2"	10	4,400



Raccordo portagomma metano diritto in ottone cromato - femmina

Chromed plated brass straight hose connection F for natural gas

cod.	misura	pz. x conf.	euro cad.
13920C000C	F 3/8"	10	2,400
13920C000D	F 1/2"	10	2,900



Raccordo portagomma metano in ottone cromato tipo curvo - femmina

Chrome brass bended hose connection F for natural gas

cod.	misura	pz. x conf.	euro cad.
13930C000C	F 3/8"	10	4,200
13930C000D	F 1/2"	10	4,800



Raccordo portagomma metano in ottone nudo tipo diritto - maschio

Yellow brass straight hose connection for natural gas M

cod.	misura	pz. x conf.	euro cad.
139400000C	M 3/8"	10	2,000
139400000D	M 1/2"	10	2,300



Raccordo portagomma metano in ottone nudo tipo curvo - maschio

Yellow brass bended hose connection M for natural gas

cod.	misura	pz. x conf.	euro cad.
139500000C	M 3/8"	10	4,200
139500000D	M 1/2"	10	4,900



Raccordo portagomma metano ottone cromato tipo diritto - maschio

Chromed plated brass straight hose connection M for natural gas


cod.	misura	pz. x conf.	euro cad.
13940C000C	M 3/8"	10	2,200
13940C000D	M 1/2"	10	2,600



Raccordo portagomma metano in ottone cromato tipo curvo - maschio

Chrome brass bended hose connection M for natural gas

cod.	misura	pz. x conf.	euro cad.
13950C000C	M 3/8"	10	4,500
13950C000D	M 1/2"	10	5,300




	cod.	misura	pz. x conf.	euro cad.
Raccordo portagomma GPL in ottone nudo tipo diritto - femmina	139600000C	F 3/8"	10	1,900
	139600000D	F 1/2"	10	2,500

GPL yellow brass
straight hose connection F



	cod.	misura	pz. x conf.	euro cad.
Raccordo portagomma GPL in ottone nudo tipo curvo - femmina	139700000C	F 3/8"	100	3,600
	139700000D	F 1/2"	100	3,800

GPL yellow brass
bended hose connection F




	cod.	misura	pz. x conf.	euro cad.
Raccordo portagomma GPL in ottone cromato tipo diritto - femmina	13960C000C	F 3/8"	10	2,400
	13960C000D	F 1/2"	10	2,900

GPL chrome plated
brass straight hose connection F



	cod.	misura	pz. x conf.	euro cad.
Raccordo portagomma GPL in ottone cromato tipo curvo - femmina	13970C000C	F 3/8"	100	4,000
	13970C000D	F 1/2"	100	4,300

GPL chrome plated
brass bended hose connection F




	cod.	misura	pz. x conf.	euro cad.
Raccordo portagomma GPL in ottone nudo tipo diritto - maschio	139800000C	M 3/8"	10	1,800
	139800000D	M 1/2"	10	2,300

GPL yellow brass
straight hose connection M



	cod.	misura	pz. x conf.	euro cad.
Raccordo portagomma GPL in ottone nudo tipo curvo - maschio	139900000C	M 3/8"	10	3,600
	139900000D	M 1/2"	10	4,200

GPL yellow brass
bended hose connection M



	cod.	misura	pz. x conf.	euro cad.
Raccordo portagomma GPL in ottone cromato tipo diritto - maschio	13980C000C	M 3/8"	10	2,200
	13980C000D	M 1/2"	10	2,700

GPL chrome plated
brass straight hose connection M



	cod.	misura	pz. x conf.	euro cad.
Raccordo portagomma GPL in ottone cromato tipo curvo - maschio	13990C000C	M 3/8"	10	4,000
	13990C000D	M 1/2"	10	5,000

GPL chrome plated
brass bended hose connection M


**Raccordo portagomma
tipo diritto in ottone
cromato**

Chrome plated brass
straight hose
connection

cod.	misura	pz. x conf.	euro cad.
6014M0000D	M 1/2" Ø 14 mm	10	4,600
6014F0000D	F 1/2" Ø 14 mm	10	4,600


**Tubo gas metano in
PVC con inserzione
tessile a norma**

UNI-CIG 7140 e marchio IMQ

PVC tube for natural gas UNI-CIG and IMQ Standard rules

cod.	misura	mt. x conf.	euro mt.
1387000000	Ø 20 x 13 mm	50	2,500


**Guaina flessibile
spiralata in materiale
plastico
autoestinguente classe
"UL 94 V.0" per
rivestimento tubi rame**

Flexible plastic
material for copper
tube "UL 94 V.0" self
extinguisher

cod.	misura	mt. x conf.	euro mt.
1555500020	Ø 20 mm	25	1,250
1555500025	Ø 25 mm	25	1,600
1555500030	Ø 30 mm	25	2,100
1555500035	Ø 35 mm	25	2,600
1555500040	Ø 40 mm	25	3,100
1555500050	Ø 50 mm	25	4,450


**Raccordo portagomma
in ottone cromato tipo
diritto**

Chrome plated brass
straight connection

cod.	misura	pz. x conf.	euro cad.
1398L00000	M 1/2" Ø 9 mm	10	3,800
1396L00000	F 1/2" Ø 9 mm	10	3,800


**Tubo gas liquido in
PVC con inserzione
tessile a norma**

UNI-CIG 7140 e marchio IMQ

PVC tube for liquid gas UNI-CIG and IMQ Standard rules

cod.	misura	mt. x conf.	euro mt.
1389000000	Ø 13 x 8 mm	50	1,300


**Guaina estensibile-
comprimibile
"Yellowfless" in PP
autoestinguente classe
"UL 94 V.0"
a norme UNI-CIG 7129**

Extensible and compressible PP "Yellowfless" "UL 94 V.0" UNI-CIG 7129 standard rule-self extinguisher

cod.	misura	mt. x conf.	euro mt.
1924310020	Ø 20 mm	50	1,000
1924310025	Ø 25 mm	50	1,250
1924310030	Ø 30 mm	50	1,500
1924310040	Ø 40 mm	50	2,600


**Fascetta stringitubo
per tubo gas**

Hose clamps for gas
pipe

cod.	misura	pz. x conf.	euro cad.
1388001220	12-22 mm	200	0,740
1388001625	16-28 mm	200	0,750




**Rotolo tubo scarico
condensa**
Roll pipe for
condensate drainage

cod.	misura	mt. x conf.	euro mt.
1555700016	Ø 16 mm	25	1,150
1555700020	Ø 20 mm	25	1,250



**Staffa di sostegno
con traversa**
Wall bracket with
traverse

cod.	misura	pz. x conf.	euro cad.
1214SC0080	100 kg traversa 800 - braccio 420	1	37,500
1214SC0150	150 kg traversa 800 - braccio 465	1	38,600

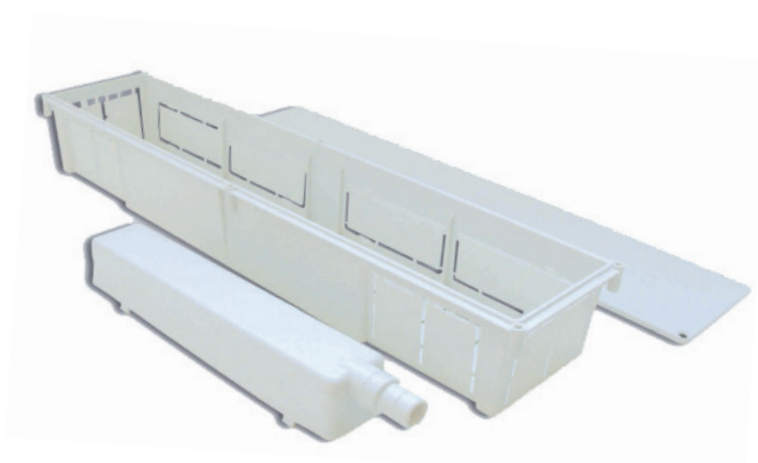

**Cassetta da incasso per impianti di condizionamento
con scarico DX-SX reversibile**

Inlet box for conditioning plants
with reversible drain DX-SX

cod.	misura	pz. x conf.	euro cad.
1214CAS000	450 x 100 x 65	1	9,000



**Sifone scarico
condensa esterno**
per impianti aria condizionata e caldaie a condensazione

Condensation external drain siphon for air conditioning systems
and condensing boilers

cod.	misura	pz. x conf.	euro cad.
1214SIFEST		1	4,800



placca 108 x 158 mm. interasse fori 78 mm.
plate 108 x 158 mm. hole spacing 78 mm.

**Sifone scarico
condensa adatto per
tubi Ø 16 - 18 - 20 mm**

Condensation drain siphon suitable for
pipe Ø 16 - 18 - 20 mm.

cod.	misura	pz. x conf.	euro cad.
1214SIF000		1	11,400
1214INOX00	con placca inox	1	13,300

